


ISSUE	DESCRIPTION	DATE
1	OFFICIAL RELEASED	

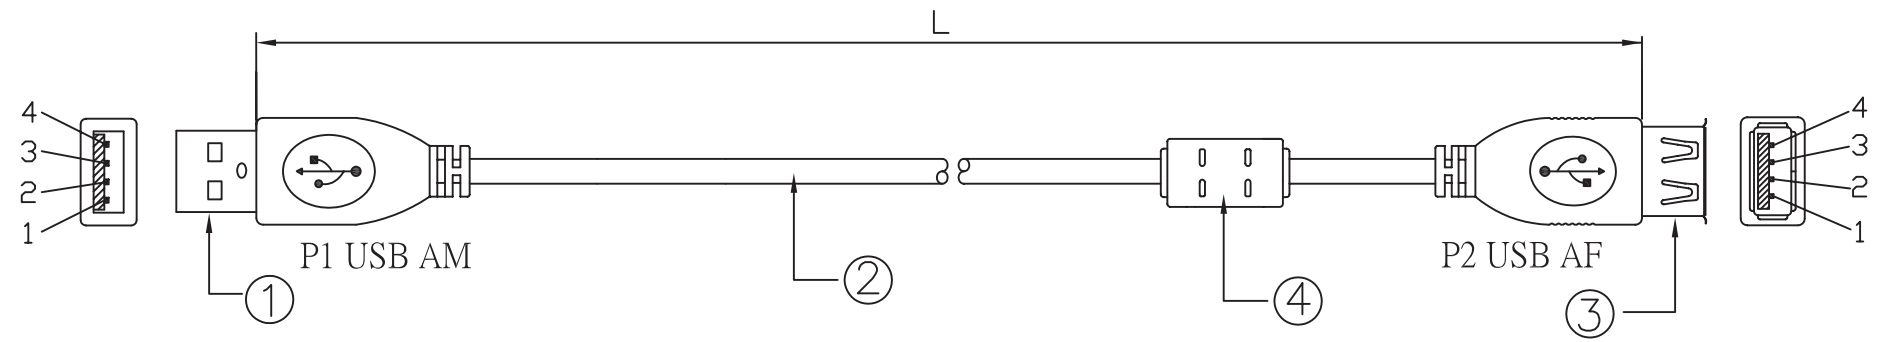

Connection		
P1	Wire	P2
1	Red	1
2	White	2
3	Green	3
4	Black	4
Shell	Braid	Shell

"L" mm	Tolerance (mm)	P/N
1800	±30	CCF-USB2-AMAF-6
3000	±30	CCF-USB2-AMAF-10
4500	±50	CCF-USB2-AMAF-15

Cable Spec:  
 1. Conductor: 28AWG Cu\*2C+24AWG Cu\*2C+AL+B  
 2. Coat: PVC Black.  
 3. OD: 4.5±0.2mm

Package: Polybag with Gembird logo

## Gembird Electronics Ltd.

Draw	Long	TITLE:	DWG NO:
Date	2010.10.11	USB2.0 AM/BM Cable	
Check		P/N:	CUSTOMER:
Date		CCF-USB2-AMBM-xx	
TOLERANCE:		EDITION:	
WHOLE NO ±0.5		1	
ANGLE ±0.5°		CUSTOMER	
UNIT:	SCAL:	SH 1 OF 1 A4	
MM	NONE		

③	USB AF socket	1	SET				
②	USB2.0 Cable, black						
①	USB AM plug	1	SET	④	Ferrite core	1 SET	
ITEM	DESCRIPTION	Q'TY	UNIT	ITEM	DESCRIPTION	Q'TY	UNIT

A

B

C

D

